


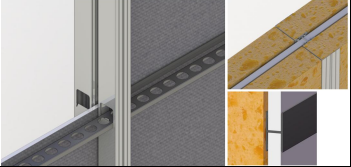
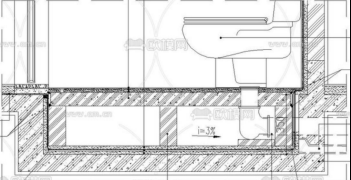


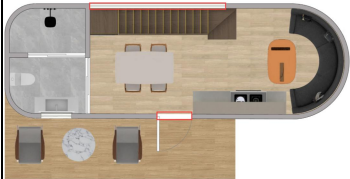
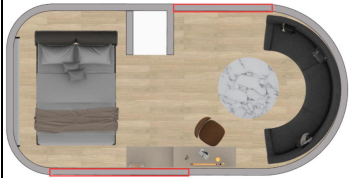





Sa3 L19*W3*3m + L6*W3*3m 27m²+18m²=45m² house configuration list

No	Component	Item	Material name	Specs	Remark
1	Steel structure main body	Bottom beam1	Hot-dip galvanized square tube	80*160mm	Subject composition  Main structure: hot-dip galvanized steel structure Insulation: polyurethane insulation 
2		Bottom beam2	Hot-dip galvanized square tube	80*40mm	
3		Corner post	Hot-dip galvanized square tube	80*160mm	
4		Wall keel	Hot-dip galvanized square tube	50*50mm	
5		Top beam1	Hot-dip galvanized square tube	80*160mm	
6		Top beam2	Hot-dip galvanized square tube	40*80mm	
7		curved corner	Steel plate laser cutting	3.0mm	
8	roof system	Exterior wall panels	Aluminum plastic panel	4mm	
9		Insulation 1	Fiberglass insulation cotton	50mm	
10		Insulation 2	extruded board	50mm	
11		suspended ceiling	Bamboo fiber ceiling board	7mm	
12	wall system	Exterior wall panels	Aluminum plastic panel	4mm	
13		Indoor substrate	Prefabricated high sound insulation partition system	m ²	120 High Sound Insulation Partition System-Node diagram 
13	wall system	Indoor substrate	Bathroom cement board base		

14	wall system	interior decorative panels	Bamboo fiber wood veneer	8mm	
15		Insulation	extruded board	50mm	
16	ground system	Ground substrate	cement pressure plate	18mm	
17		floor	SPS stone plastic lock floor	Standard thickness	
18	Door and window system	outdoor doors and windows:1F	Insulated bridge aluminum	55 Insulated Tempered Glass	
19		outdoor doors and windows:2F	Insulated bridge aluminum	55 Insulated Tempered Glass	
20		bathroom door 1F:	Extremely narrow aluminum alloy sliding door	Standard	
21		Indoor staircase			
22	air conditioning	5C air conditioning duct unit (1.5P)			
23	Electric	electric wire	Air conditioning cord 4.0, socket 2.5, light cord 1.5	National standard	
24	Electric	panel	Switch and socket panels	National standard	
25	Electric	lamps	downlight	National standard	


26	Water supply and drainage pipes	Water supply and drainage pipes	10UPVC drainage pipe, 25PP-R water supply pipe, matching elbows and jo	
27	Weight:	About 15 tons		

Product cost: \$29400
(produced according to the configuration order, the quotation does not include tax and shipping.)

Quote for internal facilities					
No	Component	Item	Material name	Price	Remark
1		Shower set*2		\$143.38	Brass lift booster rain shower set
2		toilet*2		\$281.66	Integrated smart toilet No water pressure requirement
3	Bedroom package	Wash basin + faucet/Porcelain basin + stainless steel faucet		\$208.96	Including installation or packaging Please refer to the quotation table for more styles
4	bed	Model: 3009 Size: 228*188*100cm Inner materials: Russian imported larch, solid wood board. Filling material: High-density sponge backing bag. Lambskin fabric. Accessories: Oak solid wood feet		\$420.00	
5	Outdoor terrace	Outdoor terrace: 6*1.5m		\$1,125.00	
Total internal supporting facilities				\$2,179.00	

The whole package is complete in total: **\$29400+\$2179=\$31579**

Process and produce strictly in accordance with the quotation configuration order	
Warranty	20 years
Cycle of production	30 Working day
Payment	Alibaba, Paypal,T/T.

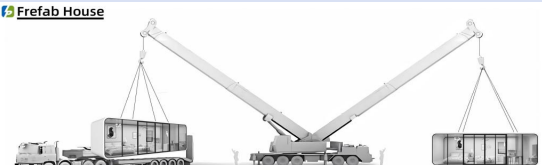Packing and transportation:	40FR frame or bulk carrier.
  Transportation Using standard international transportation, you can choose to arrange your truck to pick up the goods at the port, or you can choose to use our transportation method to directly transport the house to your doorstep Hoisting After the goods arrive at the site, the customer needs to contact the local crane service themselves. Our technical team will arrive at the site in advance for guidance (specific support areas need to be consulted with us) Installation Before installation, the plumbing system and electrical system and foundation should be prepared in accordance with the standard drawings provided by our company. Please refer to the designated location under the guidance of our technicians, and test the performance after their installation is done.	